


## DIN22258-2 FLAT CHAIN LINKS

- The flat link for mining chains is specially designed for connecting round link chains and compact chains. The forgings are made of high-quality high-alloy steel as raw materials, and are completed through precision machining and unique heat treatment processes. They have high tensile properties and fatigue life.
- Designed specifically for connecting round link chains and compact chains, they can only be used horizontally with sprockets.

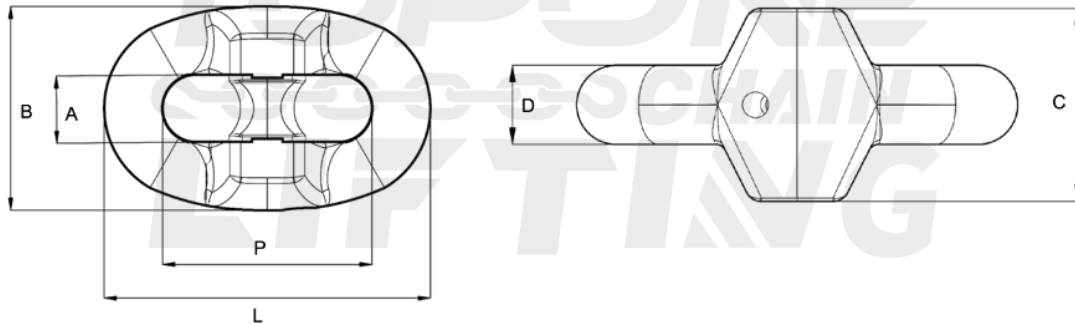

**The flat chain links must be installed horizontally to cooperate with the sprocket!**

Chain Size	D	P	C	A	L	B	Breaking Load	Fatigue Resistance	Weight
d x p (mm)	(mm)	(mm)	max. (mm)	min. (mm)	max. (mm)	max. (mm)	MBL (KN)	(cycles)	(kg)
26 x 92	26 ±0.8	92 ±0.9	65	30	148	95	1050	100000	2.5
30 x 108	30 ±0.9	108 ±1.1	75	35	170	109	1400	100000	4
34 x 126	34 ±1.0	126 ±1.3	85	36	196	120	1800	100000	6.4
38 x 126	38 ±1.1	126 ±1.3	94	43	204	134	2220	100000	7
38 x 137	38 ±1.1	137 ±1.3	94	43	215	134	2220	100000	7.6
42 x 146	42 ±1.3	146 ±1.5	105	47	232	148	2700	100000	10.7
48 x 152	48 ±1.5	152 ±1.5	118	54	249	170	3550	100000	14.4