


DIN22258-3 VERTICAL CHAIN LINKS

- The vertical link for mining is specially designed for connecting round link chains and compact chains. The forgings are made of high-quality high-alloy steel as raw materials, and are processed by precision machining and unique heat treatment processes. They have high tensile properties and fatigue life.
- They can only be used for round link chains and compact chains made according to DIN22252 and DIN22255 standards. They can only be used vertically and do not contact the sprocket, which increases the service life of the link.

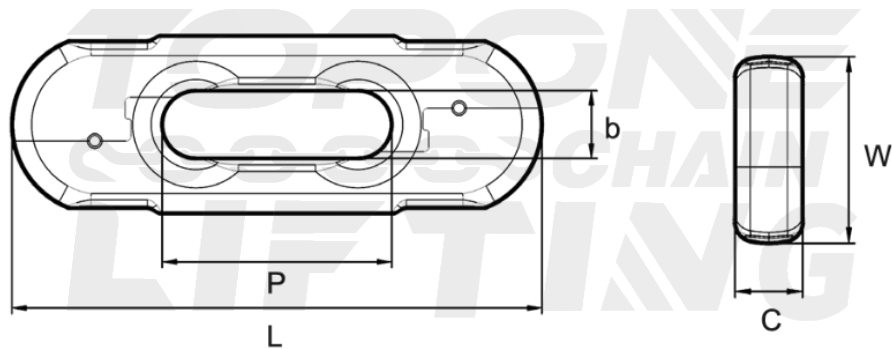

The vertical link must be installed vertically to cooperate with the sprocket made according to DIN22256 standard!

Chain Size	W	P	b	C	L	Breaking Load	Fatigue Resistance	Weight	
d x p (mm)	max. (mm)	(mm)	Tolerance (mm)	min. (mm)	max. (mm)	max. (mm)	MBL (KN)	(cycles)	(kg)
22 x 86	62	86	±0.9	26	25	186	680	70000	1.45
26 x 92	75	92	±0.9	28	28	213	960	70000	2.28
30 x 108	87	108	±1.1	32	32	241	1270	70000	3.4
34 x 126	98	126	±1.3	36	36	292	1700	100000	5.02
38 x 126	110	126	±1.3	40	40	290	1900	100000	6
38 x 137	110	137	±1.4	40	40	302	1900	100000	6.6
42 x 146	114	146	±1.5	44	44	330	2300	100000	8.2
48 x 144	127	144	±1.5	51	56	334	2900	100000	10.36
48 x 152	127	152	±1.5	53	56	331	2900	100000	11
52 x 170	127	170	±1.5	57	64	373	3700	100000	14.8
56 x 187	131	187	±1.5	60	65	411	4300	100000	15
60 x 181	137	181	±1.5	64	70	452	5000	100000	20