


DIN 5685(A) ROUND LINK CHAIN

- Suitable for any kind of fixing in the nautical, construction, agricultural and metalworking fields, the DIN 5685 chains are available in the following models:
- “A” short link chain, made in S235JR iron or in stainless steel (AISI 316 or 304);

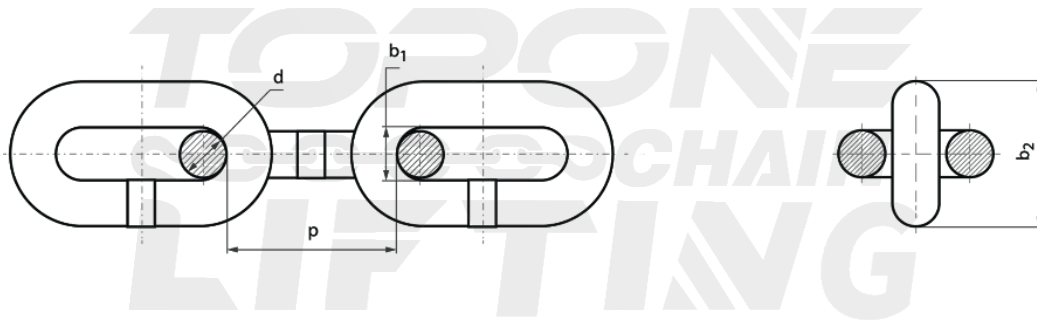

Diameter		Pitch		Inside Width	Working Load Limit	Weight (kg/m)
d	Tolerance	p	Tolerance	b1	WLL	
(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	
2	±0.10	12	±0.6	3.5	20	0.07
2.5	±0.10	14	±0.7	4.5	30	0.11
3	±0.20	16	±0.8	5.5	40	0.17
3.5	±0.20	18	±0.9	6.0	60	0.23
4	±0.20	19	±1.0	7.0	80	0.30
5	±0.30	21	±1.1	9.0	125	0.50
6	±0.30	24	±1.2	11.0	160	0.73
7	±0.40	28	±1.4	12.0	220	0.99
8	±0.40	32	±1.6	14.0	320	1.30
10	±0.50	40	±2.0	18.0	500	2.00
13	±0.70	52	±2.6	23.0	800	3.40