


DIN 5685(C) ROUND LINK CHAIN

- Suitable for any kind of fixing in the nautical, construction, agricultural and metalworking fields, the DIN 5685 chains are available in the following models:
- “C” long link chains, made in C8 iron or in stainless steel (AISI 316 or 304).

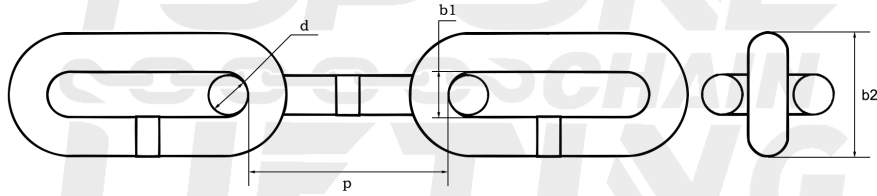

Diameter		Pitch		Inside Width	Working Load Limit	Weight
d	Tolerance	p	Tolerance	b1	WLL	(kg/m)
(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	
2	±0.10	22	±1.1	3.5	20	0.06
2.5	±0.10	24	±1.2	4.5	30	0.10
3	±0.20	26	±1.3	5.5	40	0.14
3.5	±0.20	28	±1.4	6.0	60	0.20
4	±0.20	32	±1.6	7.0	80	0.26
5	±0.30	35	±1.8	9.0	125	0.42
6	±0.30	42	±2.1	11.0	160	0.61
7	±0.40	49	±2.5	12.0	220	0.82
8	±0.40	52	±2.6	14.0	320	1.10
10	±0.50	65	±3.3	18.0	500	1.70
13	±0.70	82	±4.1	23.0	800	2.90