


DIN 764 MEDIUM LINK CHAIN

- TOPONE® can produce medium ring steel chains in accordance with DIN 764 dimensions, pitch 3.5D. Grade 3, Grade 4, Grade 6, Grade 8, calibrated and tested. Surface hardening is also available, up to 64HRC. Especially suitable for industrial conveyor chains and wear chains.

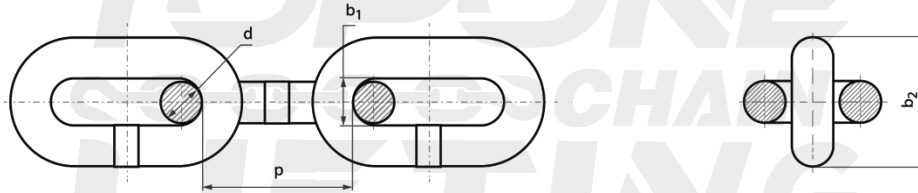

Diameter d (mm)	Pitch p (mm)	Inside b2 (Min) (mm)	Working Load Limited (kg)	Proof Load (KN)	Min Breaking Load (KN)	Weight per meter (Kg/m)
4 ±0.2	16 +0.3/-0.2	5	200	5	8	0.31
5 ±0.2	18 +0.4/-0.2	7	320	8	12.5	0.51
6 ±0.2	21 +0.5/-0.2	8	400	10	16	0.74
8 ±0.2	28 +0.5/-0.3	11	800	20	32	1.31
10 ±0.3	35 +0.6/-0.3	14	1250	32	50	2.00
12 ±0.3	42 +0.6/-0.3	16	1800	45	75	2.98
13 ±0.1	45 +0.7/-0.4	18	2000	50	80	3.50
16 ±0.5	56 +0.9/-0.5	22	3200	80	125	5.20
18 ±0.8	63 +1.0/-0.5	24	4000	100	160	6.50
20 ±1.0	70 +1.1/-0.6	27	5000	125	200	8.20
23 ±1.2	80 +1.3/-0.7	31	6300	160	250	11.00
26 ±1.3	91 +1.5/-0.5	35	8000	200	320	14.00
28 ±1.4	98 +1.6/-0.9	36	10000	250	400	16.50
30 ±1.5	105 +1.7/-0.9	39	11200	280	450	19.00
33 ±1.7	115 +1.9/-1.0	43	12500	320	500	22.50