


## DIN 766 SHORT LINK CHAIN

- Calibrated and tested grade 3 round steel link chains.
- For use in all industrial sectors.
- Special chains also available in grades 4,5, 6, 7, 8, 10 and hardened surfaces (MAX 64HRC)

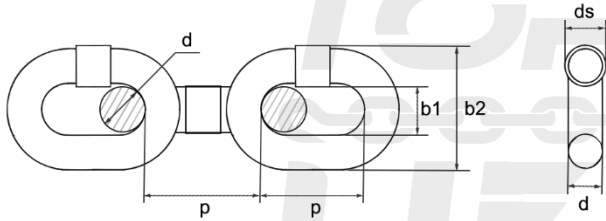

Diameter mm	Pitch mm	Width mm		Working Load Limited	Proof Load	Min Breaking Load	Weight per meter
d	p	Inside b1 (Min)	Outside b2 (Max)	WLL	MPL	MBL	kg
(mm)	(mm)	(mm)	(mm)	(kg)	(KN)	(KN)	(Kg/m)
2 ±0.2	12 +0.2/-0.2	3.5	7.5	47	1.17	1.8	0.07
3 ±0.2	16 +0.2/-0.2	4.2	11.0	105	2.73	4.2	0.16
4 ±0.2	16 +0.3/-0.2	4.8	13.6	200	5	8	0.32
5 ±0.2	18.5 +0.4/-0.2	6.0	17.0	320	8	12.5	0.5
6 ±0.2	18.5 +0.4/-0.2	7.2	20.4	400	10	16	0.8
7 ±0.3	22 +0.4/-0.2	8.4	23.8	630	16	25	1.1
8 ±0.3	24 +0.4/-0.2	9.6	27.2	800	20	32	1.4
9 ±0.4	27 +0.5/-0.3	10.8	30.6	1000	25	40	1.8
10 ±0.4	28 +0.5/-0.3	12.0	36.0	1250	32	50	2.3
11 ±0.4	31 +0.5/-0.3	13.2	40.0	1600	40	63	2.7
12 ±0.3	36 +0.6/-0.3	14.4	40.8	1800	45	75	3.1
13 ±0.5	36 +0.6/-0.3	15.6	47.0	2000	50	80	3.9
14 ±0.6	41 +0.7/-0.3	16.8	50.0	2500	63	100	4.4
16 ±0.6	45 +0.8/-0.4	19.2	58.0	3200	80	125	5.8
18 ±0.9	50 +0.8/-0.4	21.6	61.2	4000	100	160	7.4
19 ±0.9	53 +0.9/-0.4	22.8	64.6	4250	110	170	8.0
20 ±1.0	56 +1.0/-0.5	24.0	72.0	5000	125	200	9.0
23 ±1.2	64 +1.1/-0.5	27.6	83.0	6300	160	250	12.0
26 ±1.3	73 +1.2/-0.6	31.2	94.0	8000	200	320	15.0
28 ±1.4	78 +1.3/-0.6	33.6	101.0	10000	250	400	18.0
30 ±1.5	84 +1.4/-0.7	36.0	108.0	11200	280	450	20.0
32 ±1.6	90 +1.5/-0.7	38.4	115.0	12500	320	500	23.0
36 ±1.8	101 +1.7/-0.8	43.2	130.0	16000	400	630	29.0
40 ±2.0	112 +1.9/-0.8	48.0	144.0	20000	500	800	35.0
42 ±2.1	118 +2.0/-1.0	50.0	151.0	22400	560	900	40.0