


## DIN 763 LONG LINK CHAIN

- TOPONE® can produce long link steel chain in accordance with DIN 763 standard. We can also produce extra long link chain pitch 8D. Can provide Self color and hot dipped galvanized and electro galvanized finish. Suitable for lashing or safety guardrail, etc.

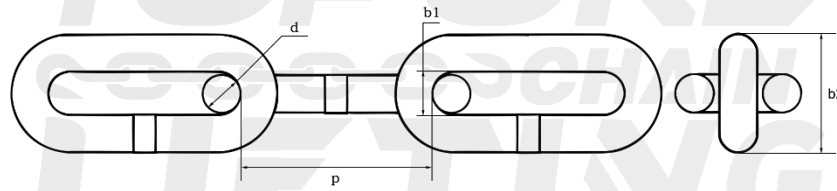

Diameter d (mm)	Pitch p (mm)	Outside b2 (Max) (mm)	Working Load Limited (kg)	Proof Load (KN)	Min Breaking Load (KN)	Weight per meter (Kg/m)
4 ±0.5	32 ±1.5	16 ±0.8	200	5	8	0.27
5 ±0.5	35 ±1.8	20 ±1.0	320	8	12.5	0.43
6 ±0.5	42 ±2.0	24 ±1.2	400	10	16	0.63
7 ±0.5	49 ±2.5	28 ±1.4	630	16	25	0.86
8 ±0.5	52 ±2.5	32 ±1.6	800	20	32	1.10
9 ±0.5	59 ±3.0	36 ±1.8	1000	25	40	1.41
10 ±1.0	65 ±3.2	40 ±2.0	1250	32	50	1.75
11 ±1.0	72 ±3.4	44 ±2.0	1600	40	63	2.11
12 ±1.0	78 ±3.6	48 ±2.3	1800	45	75	2.55
13 ±1.0	82 ±4.0	52 ±2.5	2000	50	80	2.95
16 ±1.0	100 ±5.0	64 ±3.2	3200	80	125	4.45
18 ±1.0	113 ±5.2	70 ±3.2	4000	100	160	5.65
20 ±1.0	120 ±6.0	75 ±3.8	5000	125	200	7.00
22 ±1.0	127 ±6.0	82 ±4.0	6300	160	250	8.55
25 ±1.0	140 ±6.6	85 ±4.2	8000	200	320	10.90
28 ±1.0	152 ±7.0	96 ±4.7	10000	250	400	13.90
32 ±1.0	171 ±7.8	108 ±5.2	12500	320	500	18.20