


GRADE 80 ROUND LINK CHAIN

- Ordinary alloy steel chain with medium tolerance.

It can be used for Overhead Lifting. The material contains alloy elements such as CR, NI, MO, etc., and fully complies with the requirements of EN818-2/ASTM A973/NACM2010.

It can be treated with anti-rust treatment such as electrophoresis, electroplating, powder coating, etc.

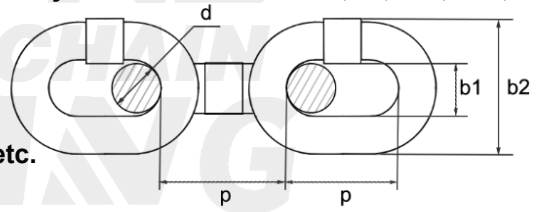

Chain Size	Inside Width min.	Outside Width max.	Working Load Limit	Proof Load	Breaking Load	Weight
d x p	b1	b2	WLL	MPL	MBL	(kg/m)
(mm)	(mm)	(mm)	(ton)	(KN)	(KN)	
6 x 18	7.5	21	1.1	27	45.2	0.79
7 x 21	9	24.5	1.5	37	61.6	1.07
8 x 24	10	28	2	48	80.4	1.38
10 x 30	12.5	35	3.2	76	125	2.2
11 x 43	12.6	36.5	3.8	92	154	2.33
12 x 36	15	42	4.6	109	181	3.1
12.5 x 38	15.5	42.2	4.9	117	196	3.3
13 x 39	16.3	46	5	128	214	3.8
14 x 42	18	49	6.3	150	250	4.13
14 x 50	17	48	6.3	150	250	4
15 x 46	20	52	7	168	280	5.17
16 x 48	20	56	8	192	320	5.63
16 x 49	24.5	59.5	8	192	320	5.71
16 x 64	23.9	58.9	8	192	320	5.11
18 x 54	23	63	10	246	410	6.85
18 x 64	21	60	10	246	410	6.6
19 x 57	23.7	63.2	11.3	270	450	7.7
20 x 60	25	70	12.5	300	500	8.6
22 x 65	28	74.2	15.3	366	610	10.7
22 x 66	28	77	15.3	366	610	10.2
22 x 86	26	74	15.3	366	610	9.5
24 x 72	32	82	18	432	720	12.78
24 x 86	28	79	18	432	720	11.6
26 x 78	35	91	21.3	510	850	14.87
26 x 92	30	86	21.3	510	850	13.7
30 x 90	38	105	28.3	678	1130	19.6
30 x 108	34	98	28.3	678	1130	18
32 x 96	40	106	32.2	772	1286	22.29
34 x 126	38	109	36.3	870	1450	22.7
34 x 102	46.5	121.5	36.3	870	1450	25.5
36 x 108	49.5	128.5	40.7	978	1630	31
38 x 137	42	121	45.3	1086	1810	29
38 x 114	52	136	45.3	1086	1810	32
40 x 120	54	144	50.2	1155	2010	35.2
42 x 126	55.5	144.5	55.4	1332	2200	38.6