


NACM2010 GRADE 100 ALLOY CHAIN

- Premium quality, highest strength alloy chain, heat treated,
- Used in a variety of sling and tie down applications.
- For overhead lifting applications, only Alloy Chain should be used.

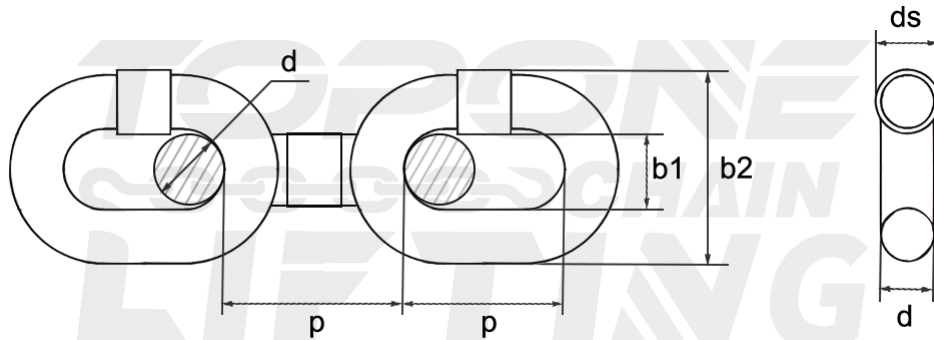

Chain Size d		Inside Length max. p		Inside Width Range b1		Working Load Limit WLL		Proof Load MPL		Breaking Load MBL	
(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(lbs)	(kg)	(lbs)	(KN)	(lbs)	(KN)
7/32	5.5	0.69	17.6	0.281~0.325	7.14~8.25	2700	1220	5400	23.8	10800	47.6
9/32	7.0	0.90	22.9	0.375~0.430	9.53~10.92	4300	1950	8600	38.5	17200	77.0
5/16	8.0	1.04	26.4	0.430~0.500	10.92~12.70	5700	2600	11400	51.0	22800	102.0
3/8	10.0	1.26	32.0	0.512~0.600	13.00~15.20	8800	4000	17600	79.0	35200	158.0
1/2	13.0	1.64	41.6	0.688~0.768	17.48~19.50	15000	6800	30000	134.0	60000	268.0
5/8	16.0	2.02	51.2	0.812~0.945	20.63~24.00	22600	10300	45200	201.0	90400	402.0
3/4	20.0	2.52	64.0	0.984~1.180	25.00~30.00	35300	16000	70600	315.0	141200	630.0
7/8	22.0	2.77	70.4	1.080~1.300	27.50~33.00	42700	19400	85400	381.0	170800	762.0